

32-1110 REV2



The RG smart load cell is a plug-and-play force measurement building block designed for integration within assembly systems, weighing systems, and other process automation and testing automation applications. All functions are controlled by commands sent from a PC or PLC via its RS-232 connector. The RG's ASCII command library allows for peak force recall, set points, data averaging, data filtering, calibration, and many other functions. A rugged aluminum housing makes the RG durable enough to withstand the rigors of manufacturing environments. Capacities are available from 2 to 200 lbF (10 to 1,000 N).


Features

- Measures tension and compression forces
- Dedicated force limit outputs for direct hardware control (relays, etc)
- RS-232 and Mitutoyo outputs
- GCL-Gauge Control Language for full computer control
- Averaging mode for average readings over time
- External trigger for contact or switch testing and data capture
- General purpose I/O for external device control
- Programmable digital filters
- Selectable units of measurement
- Programmable default configuration
- Peak memory for tensile and compressive forces
- Power via 9 - 12 VDC
- Same housing size for all capacities
- Optional cable with bare leads for integration with PC/PLC and external power supply

Specifications

- Accuracy: $\pm 0.5\%$ of full scale
- Safe overload: 150% of capacity
- Weight: 0.55 lb (0.25 kg)
- Environmental requirements: 40°F - 100°F [5°C - 45°C], <96% humidity (non-condensating)
- Warranty: 3 years
- CE mark

Dimensions in [mm]

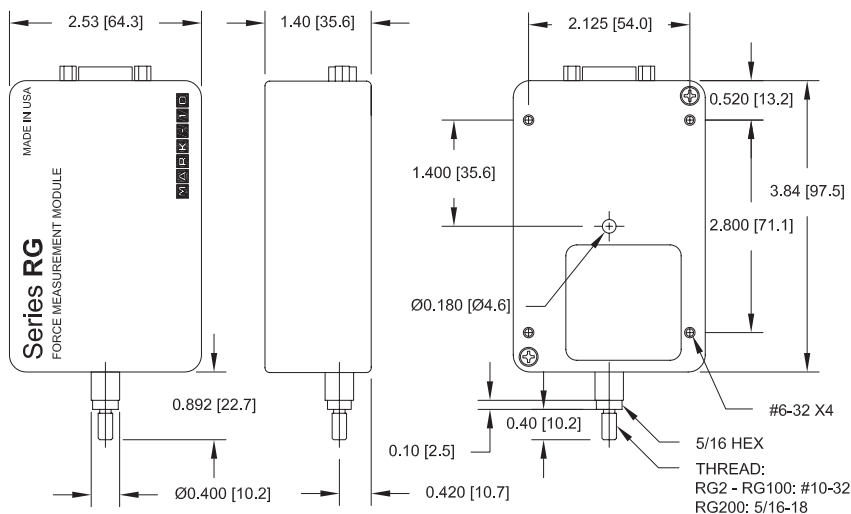

Ordering Information

| Model No. | Capacity x Resolution | Load Cell Deflection |
|-----------|--|----------------------|
| RG2 | 2 x 0.002 lb, 1 x 0.001 kgF, 10 x 0.01 N | 0.009 [0.23] |
| RG5 | 5 x 0.005 lb, 2.5 x 0.002 kgF, 25 x 0.02 N | 0.005 [0.13] |
| RG10 | 10 x 0.01 lb, 5 x 0.005 kgF, 50 x 0.05 N | 0.010 [0.25] |
| RG20 | 20 x 0.02 lb, 10 x 0.01 kgF, 100 x 0.1 N | 0.004 [0.10] |
| RG50 | 50 x 0.05 lb, 25 x 0.02 kgF, 250 x 0.2 N | 0.010 [0.25] |
| RG100 | 100 x 0.1 lb, 50 x 0.05 kgF, 500 x 0.5 N | 0.010 [0.25] |
| RG200 | 200 x 0.2 lb, 100 x 0.1 kgF, 1000 x 1 N | 0.010 [0.25] |
| 09-1161 | Interface cable, RG to bare leads | |



Mark-10 Corporation ■ www.mark-10.com ■ info@mark-10.com
 Toll-free: 888-MARK-TEN ■ Tel: 631-842-9200 ■ Fax: 631-842-9201



Specifications subject to change without prior notice